

AQUATANK

BASEMENT DEWATERING SYSTEM


The AquaTank package pump station is designed to collect ground water via a perimeter channel, 110mm pipe or a clear opening to the top of the chamber. The station comes with a single pump arrangement, the station can be supplied with a battery back-up which would ensure the pump would work in the event of a power outage.

The AquaTank can collect grey water from showers and wash-hand basins but is not suitable for foul/sewage waste from toilets. If this is required, please see our Micro Series pump station range.

The AquaTank is delivered to site as a complete package, including all internal pipework and the drainage pump. The system is designed to pump through 32mm pump main as the outlet terminates in a 1¼" male thread.

Specially designed to ensure an easy, problem-free installation and is manufactured in high grade MDPE.

We highly recommend that a high level alarm is fitted, this is available as an additional extra.

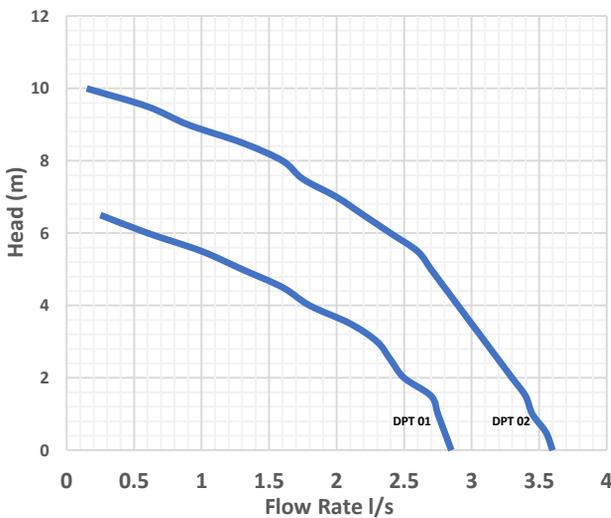

Chamber Dimensions			Access Cover	
Diameter	Height	Capacity	Size	Weight Rating
610mm	635mm	190L	450mm Dia	Pedestrian
	1000mm	300L		
	1500mm	450L		
	2000mm	600L		

Model Ref	DPT 01	DPT 02
No of Pumps	1	1
Power Supply	230 ~ 1ph ~ 50hz	
Rated Power	0.43kw	0.75kw
Rated Current	1.9A	4.0A
Max Head	6m	9m
Max Flow Rate	2.75 l/s	3.8 l/s
Cable Length	10m	10m
Max Particle Size	10mm	10mm

Additional Extras

Pipework & Fittings



High Level Alarms



Telemetry Alerts



Battery Backups



Servicing & Commissioning

