

AQUATANK PRO

TWIN PUMP BASEMENT DEWATERING SYSTEM

The AquaTank Pro package pump station is designed to collect ground water via a perimeter channel, 110mm pipe or a clear opening to the top of the chamber.


The AquaTank Pro station comes with a twin pump arrangement, this provides peace of mind knowing that you have a backup up pump. The station can also be supplied with a battery back-up which would ensure the pump would operate in the event of a power outage.

The AquaTank Pro can collect grey water from showers and wash-hand basins but is not suitable for foul/sewage waste from toilets. If this is required, please see our Micro Series pump station range.

The AquaTank Pro is delivered to site as a complete package, including all internal pipework and the drainage pumps. The system is designed to pump through 32mm pump main as the outlet terminates in a 1¼" male thread. The AquaTank Pro is specially designed to ensure an easy, problem free installation and is manufactured in high grade MDPE.



We would highly recommend that a high level alarm is fitted.

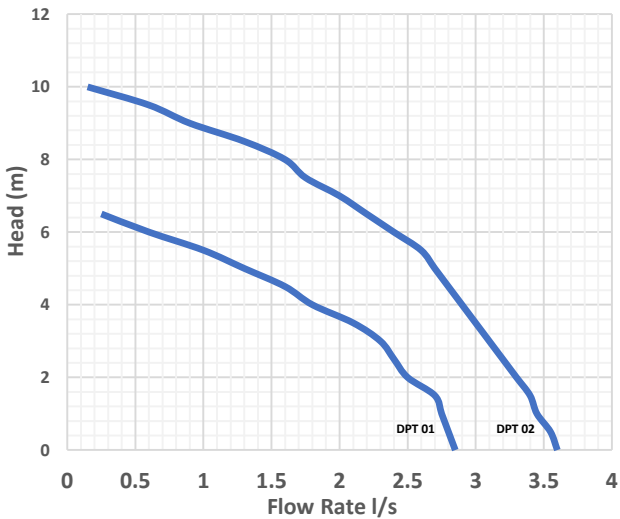

Chamber Dimensions			Access Cover	
Diameter	Height	Capacity	Size	Weight Rating
610mm	635mm 1000mm 1500mm 2000mm	190L 300L 450L 600L	450mm Dia	Pedestrian

Model Ref	DPT 01	DPT 02
No of Pumps	2	2
Power Supply	230 ~ 1ph ~ 50hz	
Rated Power per pump	0.43kw	0.75kw
Rated Current per pump	1.9A	4.0A
Max Head	6m	9m
Max Flow Rate	2.75 l/s	3.8 l/s
Cable Length	10m	10m
Max Particle Size	10mm	10mm

Additional Extras

Pipework & Fittings



High Level Alarms



Telemetry Alerts



Battery Backups



Servicing & Commissioning

