

ABOVE GROUND - SEWAGE PUMPING STATION

The AG AquaTank package pump station is designed to collect foul water from an entire property or other buildings which houses multiple people such as commercial offices and other light commercial applications.

The station comes with a single or twin pump arrangement. The twin system will come with a twin control panel for high level and pump fail.

The AG Above Ground systems are delivered to site as a complete package, including all internal pipework and the sewage pump(s). The system is designed to pump through 63mm pump main as the outlet terminates in a 2" male thread.

The AG Above ground is specially designed to ensure an easy, problem-free installation and is manufactured in high grade GRP. We recommend that a high level alarm is fitted, this is available as an additional extra.


With the system being above ground, you need to ensure you can achieve gravity fall into the chamber. This system is ideal for temporary sites or areas where excavation isn't an option.

Available in a twin pump configuration starting from 570L chambers.



GRP Chamber Dimensions			
Height (mm)	Width (mm)	Length (mm)	Capacity
509	625	625	125L
509	625	1125	250L
769	885	1115	570L
1009	721	1178	650L
1093	1125	1125	1000L
1118	1098	1598	1500L
1343	1094	2094	2501L
1593	1094	2094	3001L

Model Ref	6VX	10VX	MC
Impeller type	Vortex	Vortex	Macerator
Power Supply	230 ~ 1ph ~ 50hz		
Rated Power	0.37kW	0.75kw	1.2kW
Rated Current	1.9A	4.0A	9.2A
Max Head	6m	10m	16m
Max Flow Rate	5.5 l/s	7.9 l/s	1.8 l/s
Cable Length	10m	10m	10m
Free Passage	50mm	50mm	Macerator

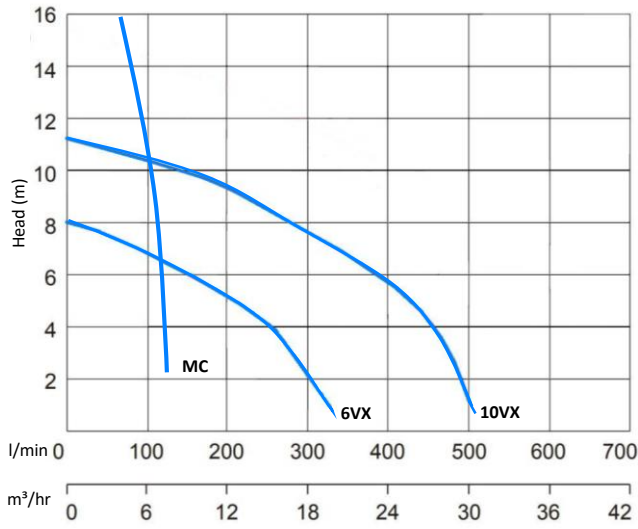

Additional Extras

Pipework & Fittings



High Level Alarms



Telemetry Alerts



Battery Backups



Servicing & Commissioning

