


Single Duty Pump Control Panel with High Level Alarm (1213A)

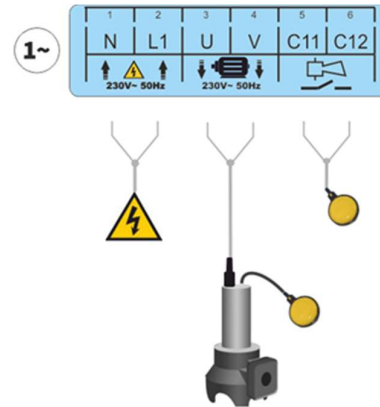

- 200 x 125 x 110 mm ABS IP 20 Plastic Box, RAL 7035 Grey
- Motor circuit breaker
- Isolator switch with auto function, overload trip indication with handle in 45 degree position
- Audio alarm with reset switch allowing to mute alarm until new anomaly without interference with alarm light
- Single phase 240V
- Current rating: 6.3 – 10A

After all wiring connections are made correctly the overload relay must be adjusted according to the motor's nominal intensity.

If the handle of the motor protector is on the automatic functioning position (1), the pump turns ON/OFF in conformity with the closing or opening of the external Start/Stop command.

Every time the alarm command (C11-C12) closes, the alarm signal will turn ON (red signal lamp) as well as the acoustic alarm, this may be shut OFF by its switch.

The trip of the motor circuit breaker due to short-circuit or overcharge turns OFF the pump, independently of the state of any of the commands. The position of the handle of the motor circuit breaker allows to differentiate when this was turned OFF due to manual intervention (handle in horizontal position) or by malfunction (handle in 45°).