

Aqua-Center-Silentio

The convenient control system

The GRAF Aqua-Center-Silentio is the central system control for your rainwater harvesting system. The microelectronics control and regulate the entire system. The pump and processor units are compactly installed with the intake container. The switching valve is sensor-controlled and opens the drinking water intake to the service water network when the water level is low in the cistern. The Aqua-Center-Silentio switches back to rainwater operation after even a brief rain shower. The Aqua-Center-Silentio is safety-tested in accordance

with DIN 1988 and EN 1717 and can be installed above the backpressure level without problems. By connecting a lifting device in accordance with DIN 1988 and EN 1717 to the overflow, installation is also possible below the backpressure level. Please follow the installation instructions. A quiet, multi-stage, self-priming centrifugal pump with professional output works below the attractive soundproof hood. The Aqua-Center-Silentio comes ready to connect – this facilitates a simple and quick start-up.

Advantages

- With automatic filter cleaning unit as option
- Regular rinsing of the drinking water reservoir prevents microbial contamination
- Digital display of the operating status and the level in the cistern



Regular rinsing of the drinking water reservoir prevents microbial contamination

The integrated dry running prediction prevents damage in the event of a water shortage and guarantees safe operation

High operating safety thanks to approved micro-processor controls (can be adjusted individually)

Operating pressure display

When required, drinking water is drawn


Digital display of the operating status and the level in the cistern

Automatic control of the Opticlean® filter cleaning unit, cleaning intervals can be programmed

Integrated emergency overflow corresponds to the new EN 1717 Part 3

Complete soundproofing of all sources of noise for quiet operation

High-quality, high-performance KSB redary pumps guarantee long, safe system operation

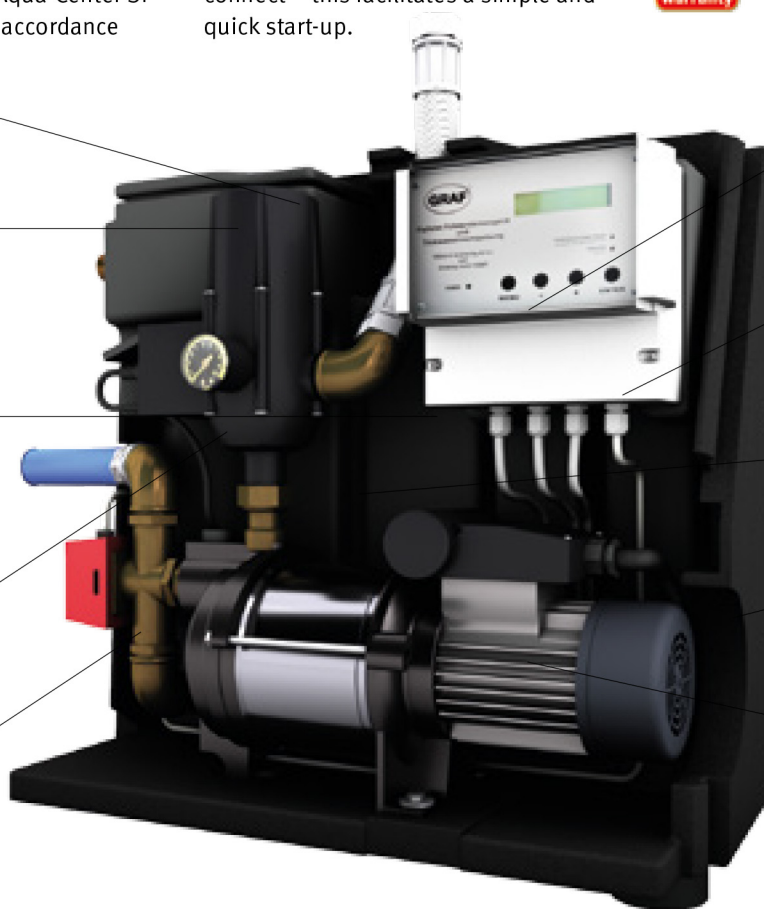

Aqua-Center-Silentio
Incl. switching valve sensor controlled and 20 m (65' 6") data line



Aqua-Center-Silentio Press
For greater distances between the tank and the house waterworks (>15 m (49' 3")) including submersible pump 300 A as a pressure pump (Page 73)

Pump	Order no.
15/4	350209
25/4	350210

Pump	Order no.
15/4	350211
25/4	350212

Accessories

Automatic filter cleaning unit

Order no. 352038

Data line 50 m (164')

2 wire with Cinch plug
Order no. 330699

Q Webcode G3102

Q Webcode G3103