


POLYLOK EASY-CLEAN 70L DOMESTIC GREASE TRAP

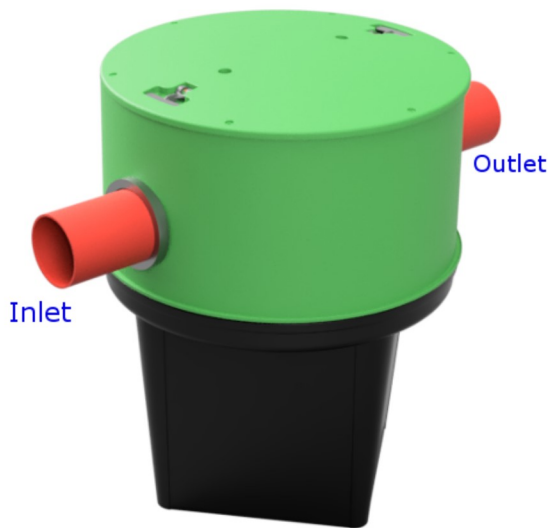

Patent Pending

Grease Traps

Oils, Fats & Greases (OFG's) are a significant issue in wastewater treatment systems. It is important for the effective operation of any wastewater treatment system (including the pipework) to trap the OFG's before it progresses through the system. This is done by removing it before complete cooling and solidifying. The removal of OFG's will reduce blockages, improve the performance of a wastewater treatment system and minimise pollution of groundwater and open waterways. The Polylok Domestic Grease Trap is the solution.

Features and Benefits

- 70 litre capacity
- Supplied with sealed access cover to contain odours
- 500mm diameter clear opening provides easy access for maintenance & cleaning (See Fig 1)
- Removable solids collection sump with handle (See Fig 2)
- Removable Inlet & outlet baffles for easy maintenance and cleaning (See Fig 3)
- Durable materials for long life.

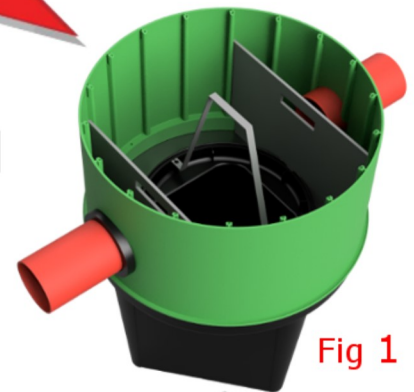


Fig 1



Fig 2

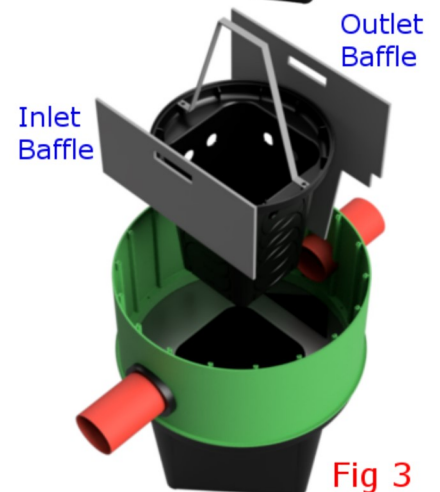


Fig 3