

**SIPHON PUMPS**    **SPH-1**    **SPH-2**    **SPH-3**

esp Bomba de transvase    fr Pompe de transvasement a Poussoir    de Handpumpe

**Product Brief**

Easy to use, polyethylene pumps siphon liquids to lower levels than the height at which the pump is installed. These are easy to prime & start within 6-7 strokes. Pump requires no further operation & keeps working in Auto position, emptying the media being pumped. All pumps are equipped with a Vent Cap on top. Opening the cap stops the discharge

To dispense media at levels higher than the pump, pump bellow needs to be continuously operated

Supplied complete with Flexible Corrugated Discharge tube

**RECOMMENDED USE**

Water-based fluids, detergents, waxes, soaps, antifreeze, some mild acids, and other liquids compatible with pump materials of construction


Pump should only be used with light weight & non-flammable liquids

**DO NOT USE**

With any media not compatible with materials used in the pump construction.

**! WARNING**

This product contains, chemicals, including lead, know to the state of California to cause cancer, birth defects or other reproductive harm.  
**Wash Hands After Handling.**

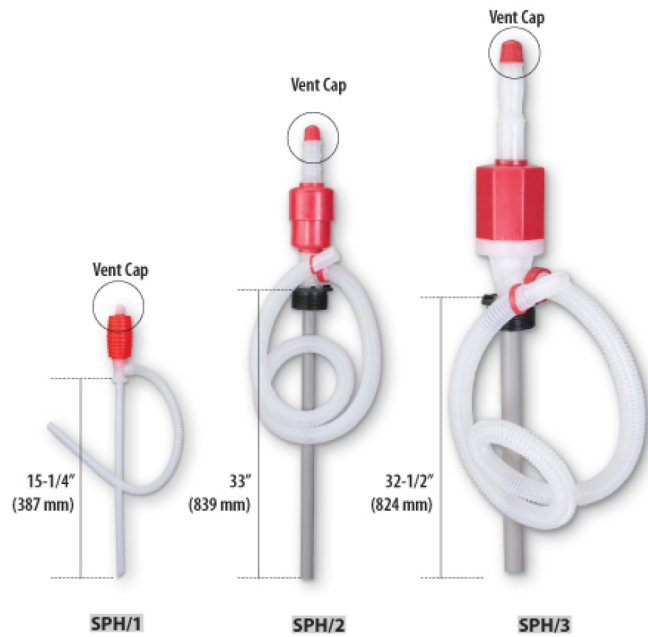

**Ordering Information**

CAT. NR.	ORD. NR.	DISCHARGE	BUNG	FITS	DISCHARGE HOSE LENGTH	WETTED COMPONENTS
SPH/1	44400	6.5 LPM / 2 GPM	1-1/2" for use with pails	5 - 20 litre / 5 gal. pails	21.69" (551 mm)	Polyethylene
SPH/2	44401	17.5 LPM / 5 GPM	2" for use with drums	205 litre / 55 gal. drums	46.45" (1180 mm)	Polyethylene & Polypropelene
SPH/3	44402	21 LPM / 7 GPM	2" for use with drums	205 litre / 55 gal. drums	47.70" (1212 mm)	Polyethylene & PVC