

CEMO DT MOBIL EASY

Innovative diesel filling stations offering a wealth of useful features.

Diesel




built-in hose brackets

The built-in hose brackets keep things tidy until you next need to fill up.



adjustable lid mount

The adjustable lid mount allows it to be installed either on the left or the right for the best possible access (460 L and 600 L).

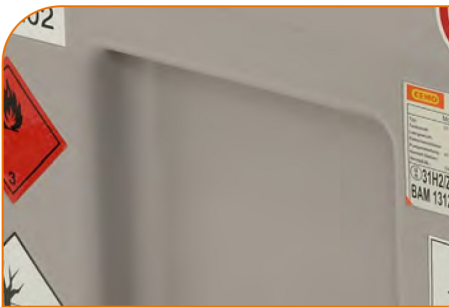

built-in ergonomic carry handles

The built-in carry handles enable the equipment to be handled easily during loading.



Video
DT-Mobil EASY



dispensing hose can be isolated

The isolation valve enables the container to be sealed off completely, thus adding to safety during transportation (125 L, 200 L, 460 L, 600 L, 850/100 L and 980 L).



integral forklift pockets

The integral forklift pockets make handling easier when the tank is full.



recesses for ratchet tie-down

Integral recesses (125 L, 200 L 210 L and 440 L) and lashing eyes (460 L, 600 L, 850 L/100 L and 980 L) to allow immobilisation with a ratchet lashing strap during transportation.



folding crane eye and lashing eyes

The folding crane and lashing eyes (460 L, 600 L, 850 L/100 L and 980 L) make it easier to secure the load in the prescribed manner, and serve at the same time as fastening eyes if the device is lifted by crane.

CEMO DT MOBIL EASY 200, 460 and 600 L PG 4

ADR CERTIFIED

Diesel



DT-Mobil EASY 600 L with electric pump, automatic nozzle and hinged lid



DT-Mobil EASY 200 L with electric pump, automatic nozzle and hinged lid



See catalogue page 153 for suitable steel bund SW 600/2

DT-Mobil EASY with ADR certification

certified for transport under ADR, examination every 2 ½ years according to ADR 6.5.4.4.1 b) and ADR 6.5.4.4.2 b).*** Completely assembled.

Container:

- 200 L, 460 L or 600 L polyethylene, single-walled
- with hinged lid (200 L version)
- with crane eyes (460 L and 600 L version)
- integral filler neck
- filler cap with vent and breather valves
- integral forklift pockets and handles
- integral recesses (200 L) or loops (460 L and 600 L) for securing with ratchet straps during transport

Pre-fitted pump:

- self-priming, pump 12 V or 24 VDC, 25 or 40 L/min, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electrical cable
- submersible pump CENTRI SP 30, 12 V, 30 L/min, extremely quiet, with automatic nozzle, 4 m dispensing hose DN 19 and 4 m electrical cable
- hand pump 25 L/min, 2.7 m dispensing hose DN 19 and manual nozzle

*** Transport certification for all plastic IBCs is limited to a life of 5 years. The 200 L model is therefore also certified for transport for direct consumption under ADR 1.1.3.1 c). Please note that transport certification for all plastic IBCs is limited to a period of 5 years.

DT-MOBIL EASY WITH ADR CERTIFICATION

Description/Capacity	Dimensions in cm (l x w x h)	Weight approx. kg	Order no.
200 L with hand pump, manual nozzle and hinged lid	80 x 62 x 61	26	10080
200 L with submersible pump CENTRI SP30, 12V, 30 L/min, automatic nozzle and hinged lid	80 x 62 x 61	24	10735
200 L with pump 12V, 40 L/min, automatic nozzle and hinged lid	80 x 62 x 61	28	10082
200 L with pump 24V, 40 L/min, automatic nozzle and hinged lid	80 x 62 x 61	28	10112
460 L without pump, with quick coupling for vehicles with integrated suction pump	116 x 80 x 81	42	10415
460 L with pump 12V, 40 L/min and automatic nozzle	116 x 80 x 81	47	10416
460 L with pump 24V, 40 L/min and automatic nozzle	116 x 80 x 81	47	10417
460 L with pump 12V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 86	60	10418
460 L with pump 24V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 86	60	10419
600 L without pump, with quick coupling for vehicles with integrated suction pump	116 x 80 x 102	48	10084
600 L with pump 12V, 40 L/min and automatic nozzle	116 x 80 x 102	53	10085
600 L with pump 24V, 40 L/min and automatic nozzle	116 x 80 x 102	53	10086
600 L with pump 12V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 107	66	10087
600 L with pump 24V, 40 L/min, automatic nozzle and hinged lid	116 x 80 x 107	66	10088

Accessories: see page 44