




Atlas Rotationally Moulded Plastic Tanks

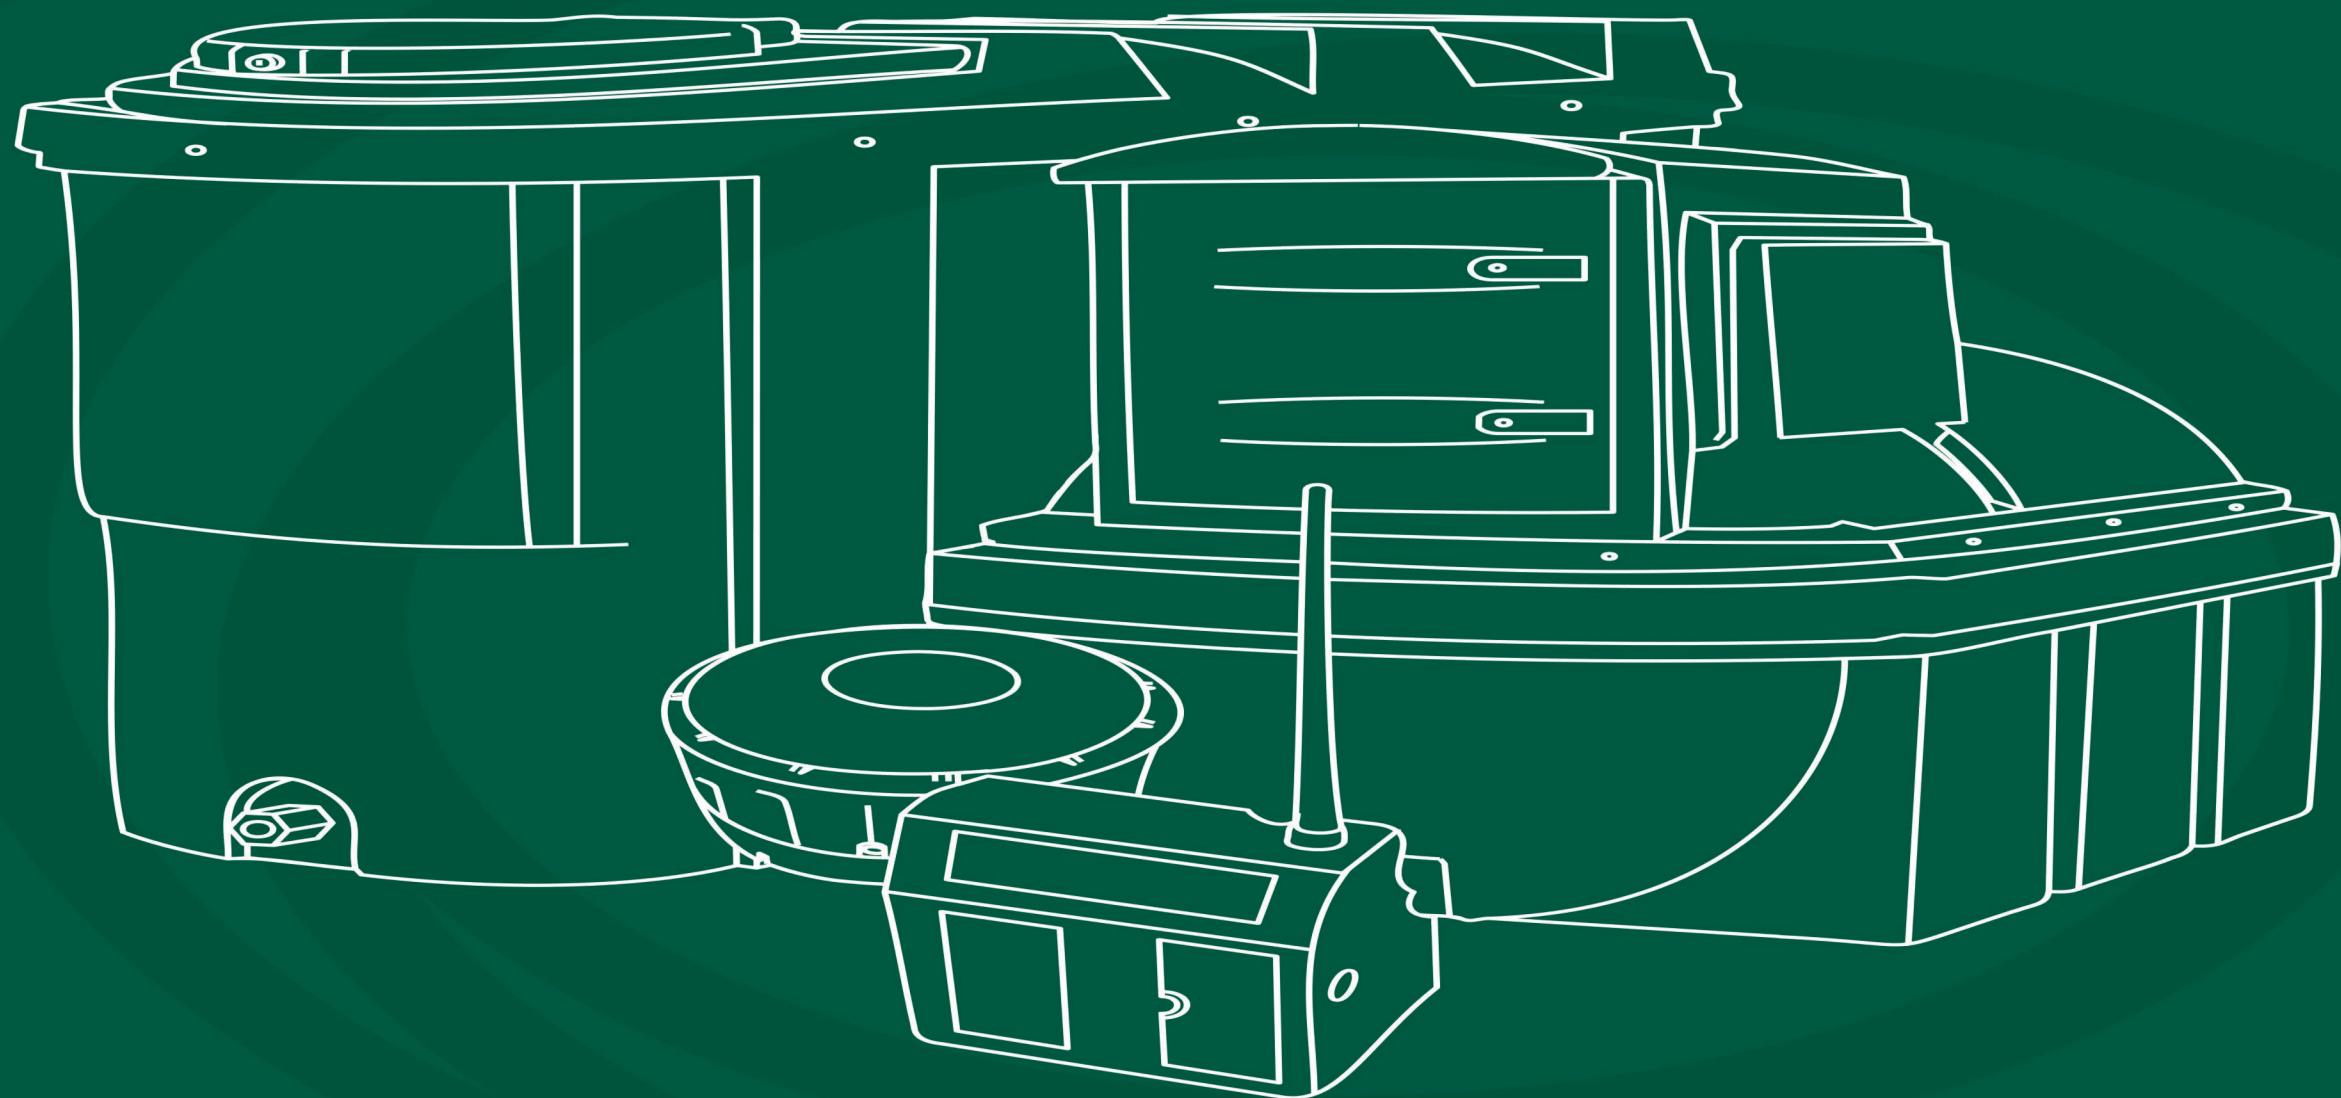

When you buy an Atlas Tank, you buy the best!

Whether you are replacing an old oil tank or installing a brand new heating system, you need to be sure you are using the best.

You want a strong, attractive tank at an affordable price. A tank that will give you security and many years of trouble-free service - a tank you can install and forget about - an Atlas Tank.

Choose from our wide range of designs. Every Atlas oil tank comes as standard with the installation kit, Watchman Sonic Advanced remote electronic gauge and SpillStop overfill prevention valve.

A complete proven range of tanks for today's market from Atlas.

Approved by the experts

Important Information

Atlas Warranty

Product	Warranty Period
Bunded Oil Tanks	10 years
Fuel Depot	10 years
Fuel Depot Utility	10 years
AdBlue® Tanks	10 years
Potable & Non-Potable Water Tanks	10 years
Waste Oil Storage	10 years
Single Skinned Oil Tanks	2 years

Atlas Tanks' ancillary equipment has a 12-month warranty; dispensing hoses and nozzles have a 3-month warranty. Warranty may be void if the tank is improperly installed, misused, damaged, or repaired without Atlas Tanks' approval. Installation by a qualified OFTEC approved installer is required, following OFTEC codes of practice.

Before Installation

Prior to installing an oil storage tank, the installer should conduct a comprehensive risk assessment, prioritising the TI/133D Risk Assessment Forms provided by OFTEC. It's essential to be aware that regional requirements may differ. If you have any concerns, always contact your local OFTEC registered technician who can advise fully.

For installations at commercial, industrial, or institutional premises, a bunded tank is mandatory.

Table of Contents

Important Information	2
Bunded Tanks Horizontal	4
Bunded Tanks Slimline	5
Bunded Tanks Vertical	6
Single Skinned Tanks	8
Fuel Depots	10
Fuel Depots Utility Range	12
Adblue® Tanks	14
Water Tanks	15
Waste Oil Tanks	17
Coal Bunkers	17
Installation Kit Accessories	18

Bunded Oil Tanks

Horizontal

10 Year
WarrantyDouble
ConstructionMeets Local
RegulationsRobust
DesignQuality
MaterialWatchman Tank
Pack Included

1200LPBA 'NEW'

W 1200mm H 970mm
L 1800mm
Capacity: 1200 Litres
Brimful Capacity: 1222 Litres
Footprint: 1700 x 1180 mm
Weight: 130 kgs



1300BHA

W 1300mm H 1370mm
L 1800mm
Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1500 x 1240mm
Weight: 115 kgs



1900BHA

W 1540mm H 1470mm
L 2190mm
Capacity: 1900 Litres
Brimful Capacity: 2110 Litres
Footprint: 1830 x 1290mm
Weight: 150 kgs



2500BHA

W 1550mm H 1610mm
L 2250mm
Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1840 x 1480mm
Weight: 200 kgs



1300BHA

1000BSLA



Atlas oil tanks are suitable for:
Grade A2 Gas Oil (BS2869), Grade
D Gas Oil (BS2869), Grade C1/
C2 Kerosene (BS2869), Diesel
fuel (EN590), Paraffinic diesel fuel
(EN15940), Biofuel/HVO (EN15940).



650BSLA

W 630mm H 1380mm
L 1270mm
Capacity: 650 Litres
Brimful Capacity: 703 Litres
Footprint: 610 x 1180mm
Weight: 90 kgs



1000BSLA

W 650mm H 1360mm
L 1890mm
Capacity: 1000 Litres
Brimful Capacity: 1024
Litres
Footprint: 1860 x 610mm
Weight: 130 kgs



1225BRA

W 860mm H 1550mm
L 2100mm
Capacity: 1225 Litres
Brimful Capacity: 1248 Litres
Footprint: 2010 x 860mm
Weight: 140 kgs



1235BSLA

W 650mm H 1590mm
L 2000mm
Capacity: 1235 Litres
Brimful Capacity: 1238 Litres
Footprint: 1860 x 610mm
Weight: 150 kgs

Slimline/Rectangular



1400BSLA

W 660mm H 1695mm
L 2140mm
Capacity: 1400 Litres
Brimful Capacity: 1443 Litres
Footprint: 2100 x 630mm
Weight: 165 kgs

Vertical

**1300BVA**

D 1425mm **H** 1530mm
Capacity: 1300 Litres
Brimful Capacity: 1369 Litres
Footprint: 1390mm
Weight: 110 kgs

**2300BVA**

D 1680mm **H** 1710mm
Capacity: 2300 Litres
Brimful Capacity: 2448 Litres
Footprint: 1670mm
Weight: 165 kgs

**3500BVA**

D 2120mm **H** 1600mm
Capacity: 3500 Litres
Brimful Capacity: 3661 Litres
Footprint: 2075mm
Weight: 198 kgs

*When you invest in Atlas you are buying **strength, affordability and reliability** - fully specified and approved - **tanks you can trust.***

Adblue® TANKS

Atlas manufacture AdBlue® dispensing units which come complete with the following as standard:



Inline Pump



Optional Inline Flowmeter



2" BSP Stainless Steel Dry Coupling



Robust Design



Automatic Nozzle



Hydrostatic Level Gauge

**1300ABDA**

W 1300mm **H** 1745mm
L 1800mm
Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1600 x 1224mm
Weight: 140 kgs

**2500ABDA**

W 1520mm **H** 1975mm
L 2235mm
Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1900 x 1475mm
Weight: 220 kgs

**5000ABDA**

W 2090mm **H** 2310mm
L 2570mm
Capacity: 5000 Litres
Brimful Capacity: 5002 Litres
Footprint: 2570 x 2090mm
Weight: 330 kgs

Important

All Atlas Tanks need to be installed by a competent engineer in accordance with local regulations.

Single Skin Tanks



2 Year
Warranty



Corrosion
Resistant



Meets Local
Regulations



Robust
Design



Quality
Material



Watchman Tank
Pack Included



1150SLA

D 700mm **H** 1450mm
L 1795mm

Capacity: 1150 Litres
Brimful Capacity: 1198 Litres
Footprint: 1695 x 640mm
Weight: 75 kgs



2500VA

D 1600mm **H** 1570mm

Capacity: 2500 Litres
Brimful Capacity: 2587 Litres
Footprint: 1550mm
Weight: 65 kgs



1300HA

W 1075mm **H** 1160mm
L 1620mm

Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1360 x 990mm
Weight: 55 kgs



2500HA

W 1330mm **H** 1400mm
L 2000mm

Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1650 x 1235mm
Weight: 90 kgs



Fuel Depots

Atlas Fuel Depots Standard specification supplied with integral 72lpm 230v pump (all models), 6m hose and auto nozzle, float level gauge, Spill-stop and 10 micron water and particulate filter.

Advanced specification has the addition of a digital flowmeter and digital level gauge. Pro specification includes digital flowmeter and our Watchman Access cloud-based fuel monitoring system. Available for 3500Ltrs + capacities. Customisation: Optional extras for 3500-9200L capacity tanks - faster 230v pump (100 lpm) and/or an 8m hose reel. Please contact our office for further info.



10 Year
Warranty



Accessible Level
Fill Point



Auto
Nozzle



6m Hose



Water &
Particle Filter



Overfill
Protection



9200FDA



1300FDA



1300FDA

W 1300mm H 1745mm

L 1800mm

Capacity: 1300 Litres

Brimful Capacity: 1383 Litres

Footprint: 1600 x 1224mm

Weight: 140 kgs

No Flowmeter Product Code:1010705

Flowmeter Product Code:1010723



2500FDA

W 1520mm H 1975mm

L 2235mm

Capacity: 2500 Litres

Brimful Capacity: 2549 Litres

Footprint: 1900 x 1475mm

Weight: 220 kgs

No Flowmeter Product Code:1010706

Flowmeter Product Code:1010724



5000FDA

W 2090mm H 2310mm

L 2570mm (inc. box)

Capacity: 5000 Litres

Brimful Capacity: 5002 Litres

Footprint: 2570 x 2090mm

Weight: 330 kgs

No Flowmeter Product Code:1010707

Flowmeter Product Code:1010725



9200FDA

W 2490mm H 2810mm

L 3100mm

Capacity: 9200 Litres

Brimful Capacity: 9211 Litres

Footprint: 2450 x 2780mm

Weight: 464 kgs (inc. POD)

Important

All mains powered Atlas Fuel Depots must be connected and maintained by a suitably qualified electrician in-accordance with local regulations.

Fuel Depots Utility Range

Atlas Utility Depots Standard specification supplied with integral 72lpm 230v pump (all models), 6m hose and auto nozzle, float level gauge, Spill-stop and 10 micron water and particulate filter.

Advanced specification has the addition of a digital flowmeter and digital level gauge.

Pro specification includes digital flowmeter and our Watchman Access cloud-based fuel monitoring system. Available for 3500Ltrs + capacities.

Customisation: Utility Depots are available with 12v (no extra cost) and 110v pump (extra cost). Optional extras for 3500-9200L capacity tanks - faster 230v pump (100 lpm) and/or an 8m hose reel. Please contact our office for further info.



Lockable Cabinet Door



Accessible Level Fill Point



Auto Nozzle



6m Hose



Water & Particle Filter



Overfill Protection



1300VFDA



5000LPVFDA



1300VFDA

D 1425mm H 1835mm

Capacity: 1300 Litres

Brimful Capacity: 1369 Litres

Footprint: 1390mm

Weight: 130 kgs



2300VFDA

D 1700mm H 1850mm

Capacity: 2300 Litres

Brimful Capacity: 2448 Litres

Footprint: 1650mm

Weight: 170 kgs



3500VFDA

D 2100mm H 1905mm

Capacity: 3500 Litres

Brimful Capacity: 3661 Litres

Footprint: 2060 mm

Weight: 215 kgs



5000LPVFDA

D 2480 H 2000

Capacity: 5000 Litres

Brimful Capacity: 5216 Litres

Footprint: 2430mm

Weight: 300 kgs



Watchman Access System

Watchman Access Fleet Management System enables you to take control of your assets and save costs using the latest cloud based technology.

Save costs, Simplify reporting and Take control of your assets.

- Never run out of fuel*
- Monitor your fuel levels remotely 24/7
- Take control
- Manage the fuel used by each vehicle / driver
- Secure your fuel
- Stop unauthorised access

*Customer's responsibility to set alarm function

Water Tanks

Atlas Potable Tanks. Specifically designed to store water for emergency human consumption or animal drinking, the Atlas potable water tanks are fully recyclable and made from WRAS approved material. They must be installed on a firm, solid flat base and be fully supported.

Atlas Non - Potable Tanks. Designed as a basic water storage tank for non-drinking (not intended for human consumption) use such as vehicle washing, irrigation and washdowns. Must be installed on a firm, solid flat base and be fully supported.



10 Year
Warranty



Robust
Design



Easy Access
Point



Lockable
Door



Quality
Material



9200VWTA



1500VWTA



1200VWTA

D 1160mm
H 1270mm

Capacity: 1200 Litres
Brimful Capacity: 1173 Litres
Weight: 26 kg
Outlet: 1" BSP



1500VWTA

D 1100mm
H 1780mm

Capacity: 1550 Litres
Brimful Capacity: 1495
Litres
Weight: 40 kg
Outlet: 1" BSP



1675VWTA/
1675VDWTA

D 1425mm
H 1575mm

Capacity: 1675 Litres
Brimful Capacity: 2052 Litres
Weight: 61 kg
Outlet: 2" BSP



3050VWTA/
3050VDWTA

D 1710mm
H 1810mm

Capacity: 3050 Litres
Brimful Capacity: 3179 Litres
Weight: 91 kg
Outlet: 2" BSP



6250VWTA/
6250VDWTA

D 2120mm
H 2340mm

Capacity: 6250 Litres
Brimful Capacity: 6909 Litres
Weight: 140 kg
Outlet: 2" BSP



9200VWTA/
9200VDWTA

D 2260mm
H 2700mm

Capacity: 9200 Litres
Brimful Capacity: 9421 Litres
Weight: 181 kg
Outlet: 2" BSP



12000VWTA/
12000VDWTA

D 2490mm
H 2860mm

Capacity: 12000 Litres
Brimful Capacity: 12933 Litres
Weight: 261 kg
Outlet: 2" BSP

VWTA - Non-Potable
Water Tank
VDWTA - Potable
Water Tank

Waste Oil Storage

Engineered specifically for the storage of waste oils and lubricants, every Atlas Bunded Waste Oil Tank is supplied complete with:

- Large Capacity Tundish
- Lockable Lid
- Removable Strainer
- Bund Alarm



Coal Bunker



150 Kg Coal Bunker

W 600mm H 770mm

L 850mm

Capacity: 150 kg



300 Kg Coal Bunker

W 880mm H 970mm

L 950mm

Capacity: 300 kg



600 Kg Coal Bunker

W 970mm H 1140mm

L 1190mm

Capacity: 600 kg

Accessories

Product Code	Shape:	Brimful Capacity (litres)	Length (mm)	Width (mm)	Height (mm)
1200WOWA	Low profile	1289L	2000	650	1660
1550WOWA	Horizontal	1480L	2000	950	1500
1800WOWA	Horizontal	1899L	1970	1350	1510
2500WOWA	Horizontal	2518L	2300	1250	1450
1000WOWA	Slimline	973L	1890	645	1340
650WOWA	Slimline	668L	1300	630	1350
1235WOWA	Slimline	1175L	2140	660	1695
1400WOWA	Slimline	1371L	2000	1400	930
1230WOWA	Vertical	1172L	-	1250	1600
1340WOWA	Vertical	1301L	-	1410	1530
2350WOWA	Vertical	2326L	-	1700	1730
3500WOWA	Vertical	3478L	-	2120	1600
5000WOWA	Vertical	5038L	-	2120	2300
9200WOWA	Vertical	8950L	-	2800	2800



Atlas Installation Kit

Atlas makes it easier with an installation kit supplied with every heating tank.

The kit includes:

- Lever valve and filter
- PTFE tape
- Watchman Sonic Advanced Transmitter
- Watchman Sonic Advanced Receiver



Watchman

Atlas heating tanks are fitted with the Watchman Sonic Advanced* remote electronic gauge:

- 200 metre transmitter to receiver range
- Low power consumption
- Displays tank level
- Low level warning


* excludes Utility Range

Automatic Overfill Prevention Valve

Deliveries made into tanks equipped with the SpillStop ensure that the environment is protected if an attempt is made to overfill the tank. This cleverly designed valve shuts off the fill point once oil reaches tank capacity. Suitable for any tank - single skin or bunded.

- Easily retro-fitted for environmental protection
- 2" BSP Connection
- Ideal for original fit by tank manufacturers
- BS EN 13616: 2004
- Type A TUV Nord Cert approved

Notes





ATLAS TANKS
180 Gilford Road Portadown Co Armagh
Northern Ireland
BT63 5LF

T: +44(0)333 121 6677
E: sales@atlastanks.co.uk
W: www.atlastanks.co.uk