

PL-68 Filter and Tee

PL-68 is much more than just an effluent filter. The housing can also be used as an inlet baffle (tee) or an outlet baffle. The housing is designed to accept Polylok's snap in gas deflector to deflect gas bubbles away from the tee and to keep the solids in the tank.

Features:

- 1.6mm filtration slots
- Accepts 3/4" PVC pipe handle
- Locks in any 360° position when used with PL-68 Tee
- PL-68 housing alone can be used as an inlet or outlet tee
- Gasket prevents bypass

PL-68 Installation: (should be completed by a suitably competent person)

Easy to install in a new or existing septic tank or treatment system chamber on the 110mm (4") outlet pipe.

1. Locate the outlet pipe
2. Remove the access cover and pump down the liquid level in the tank if necessary.
3. Glue the filter tee housing (& reducer bushing) to the outlet pipe. If the pipe is too short the Polylok extend & lok can be used.
4. Insert the PL-68 filter cartridge into the tee housing.
5. Replace and secure the access cover.

PL-68 Maintenance: (should be carried out by a suitably competent person)

The PL-68 cartridge should be removed and cleaned as required to ensure efficient operation. Typically in normal residential applications this is required once per annum.


1. Do not use the plumbing system when cleaning
2. Remove the PL-68 cartridge
3. Wash the filter until clean over the tank ensuring all solids fall back into the tank.
4. Insert the filter cartridge back into the tee housing.

Related Products:

PL-68 filter for a concrete square baffle
 Extend & Lok



Extend & Lok™
 Easily installs into existing tanks.

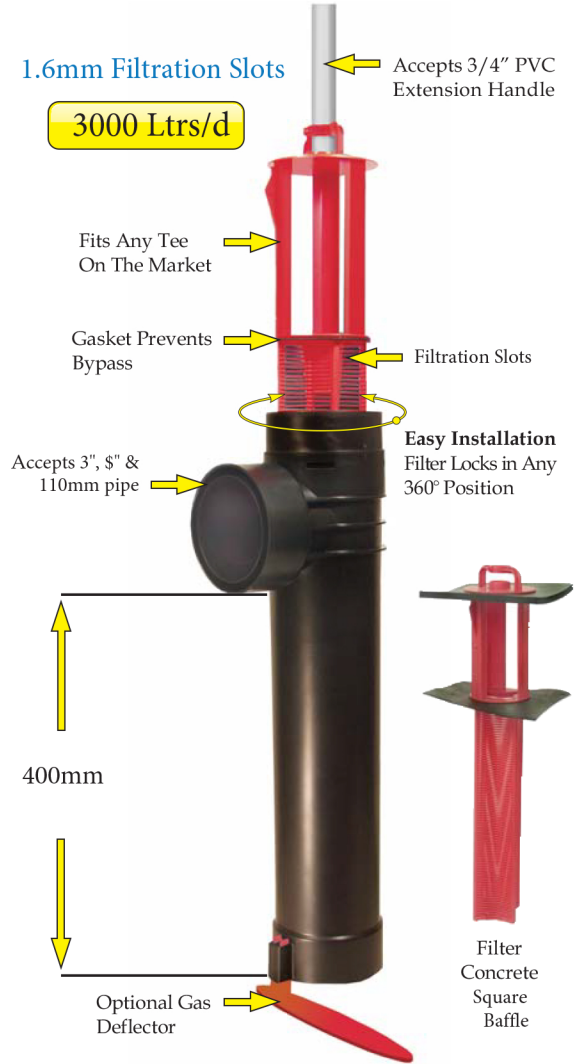

Spacer Bushing
 4" SCHD 40
 to SDR 35



Spacer Bushing
 4" SCHD 40
 to 110mm Pipe



2" Extender