


Comments

Please Note - Inlet invert should be between 400 - 2015 mm.

Inlet seals and ducts can be supplied loose to be drilled and fitted on site

Fabrication Specifications				
ITEM	INDEX	DEPTH (mm)	DIA. (mm)	CLOCKFACE POSITION
Tank depth	A	2500	-	-
Tank Ø	B	-	1200	-
Inlet	C1		110	
Inlet	C2			
Inlet	C3			
Discharge	D	63		
Cable duct			110	
Vent			110	

Kiosk (Single Door)		
Length (mm)	Width (mm)	Height (mm)
750	400	1250

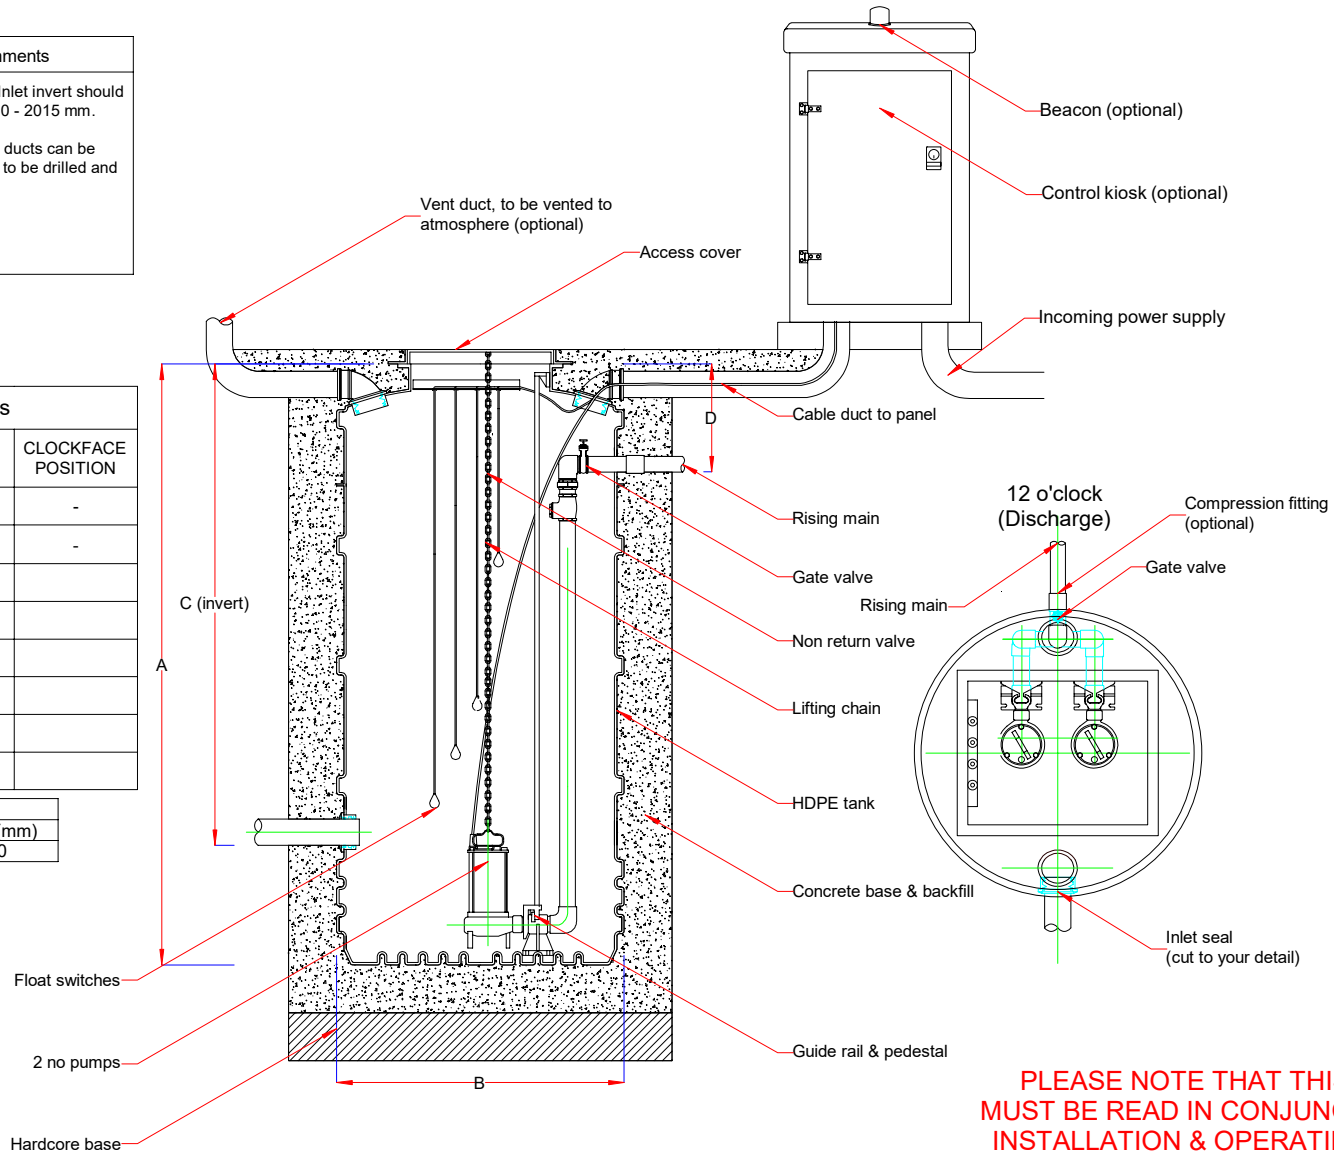

PLEASE NOTE THAT THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH THE INSTALLATION & OPERATING GUIDELINES

REV	DETAIL	DATE	DRAWN


TITLE

**Twin rigged
Ø1200 x 2500 mm
typical layout**

CUSTOMER

DRAWING NO	DATE
DPT112118	05/12/2018

DRAWN	SCALE
gf	NOT TO SCALE
SHEET	1 of 1

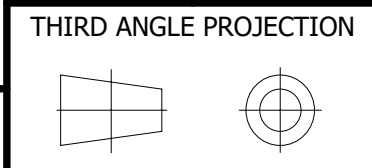

TOLERANCE +/- 2%

REV	0
-----	---