



**Cim-Tek®  
Filtration**

Remove water from your fuel storage tank with Cim-Tek's

# TANK DRYER

## GET THE WATER OUT!!


**NEW!**



**FROM THE INNOVATOR OF WATER REMOVAL FILTERS**

*U.S. Patent #4623560*

- Removes water from diesel, biodiesel, gas, & fuel oil
- FAST...Effective in as little as 24 hours
- Reduces engine downtime and maintenance costs

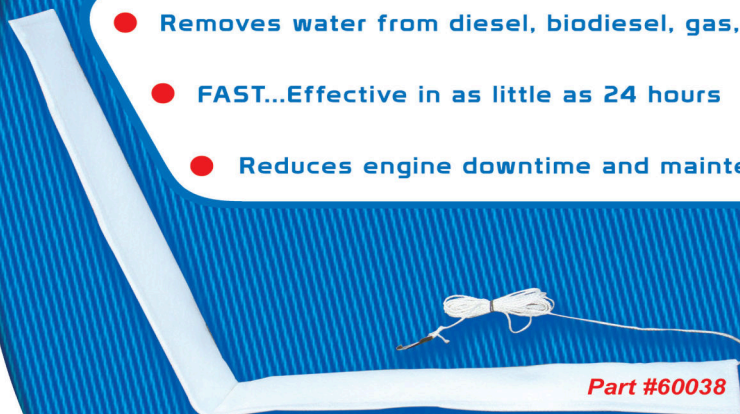

**CENTRAL ILLINOIS MANUFACTURING COMPANY**  
201 N. CHAMPAIGN STREET • BEMENT, IL 61813 • TOLL FREE PH: 888-898-7187 • TOLL FREE FAX: 888-515-2611  
PHONE: 217-678-2511 • FAX: 217-678-2611 • INFO@CIM-TEK.COM • WWW.CIM-TEK.COM

**Part# 60038**

## Cim-Tek Filtration Tank Dryer

Absorbs water from the bottom of your fuel tank, contains super-absorbent polymer

***Tank opening diameter 2" or over***

### Instructions:

1. Extinguish cigarettes or any other flammable material before opening fuel tank.
2. Be sure diameter of the tank opening will allow the **Tank Dryer** to be put into and removed from tank easily.
3. Hold the cord and lower the **Tank Dryer** into the tank.
4. Be sure the cord will allow the **Tank Dryer** to lie flat on bottom of tank. (This is where the water will be.) Shorten cord to remove excess slack.
5. Attach the retrieval cord to allow fuel cap to be replaced, but be available to remove the **Tank Dryer** when it is full.  
(Note: The best place to attach the cord is on the underside of the fuel cap.)
6. When the **Tank Dryer** starts to absorb water, it will expand. Until this condition occurs it may remain in the fuel tank, but should be checked in an hour.  
***\*\*The Tank Dryer should be checked weekly and removed when swollen.***
7. Install the **Tank Dryer** so you don't obstruct the fuel outlet or sending unit.

**Important Note:** alcohol-based fuel additives designed to disperse water will reduce the effectiveness of the Tank Dryer. **NOT FOR USE WITH ETHANOL BLENDS.**

